


Marion ProSynth power supply (updated 21 Aug 2014, <https://www.facebook.com/leadingmotive>)

The only place I found a matching transformer was on eBay. Search for "1A Secondary 30VA Transformer With 15-0-15 Vac Outputs - Altai P028" and you will find the current offer from seller armcodirect in UK. Ideally the voltage should have been 14-0-14V, but 1V more or less should not matter. Note this is for 220/240V AC power! If you have a different voltage (110V) then you have to find something else.

The transformer box and plugs you have to purchase separately. The plug is a standard DIN 4-pin plug, best if you use those made for strong current. At www.voelkner.de I found it as part number D22502. A flimsier audio-style one would work too (D24150). Then the transformer box (S26187), which just about fits, maybe better to use a bigger one (S57647).

The transformer has three wires (2 yellow, 1 black). For the connections, if you look at the plug from the front, pointing the dent upwards, the yellow wires go to top left and right, and the black one to bottom right. No connectors to frame nor to bottom left. If you check with a voltage meter, you should get ca. 15V between any of the yellow and the black wire, and ca. 30V between two yellows.

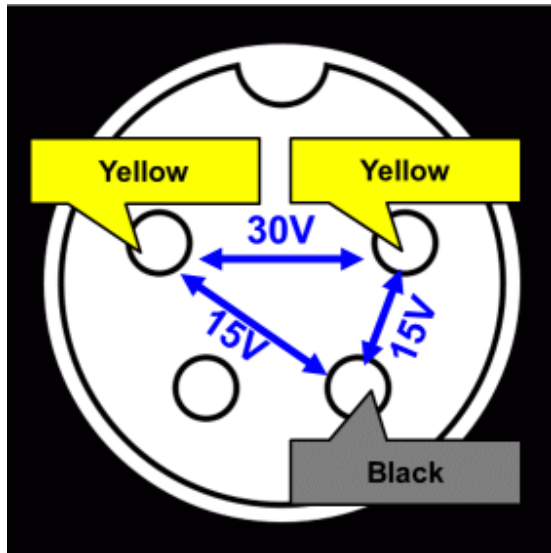

Please ask if you need any more help!